


Spec Sheet for 7259 Internal Shock Absorbing Lanyard

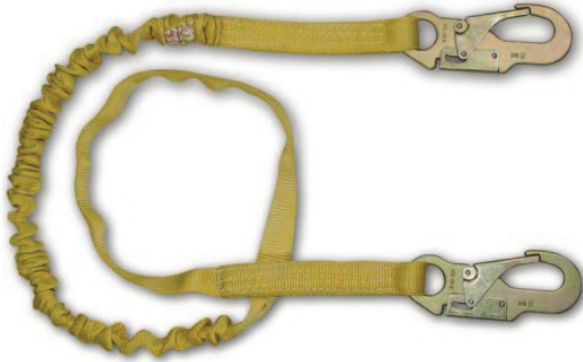

Features:

- Single-leg lanyard for fall arrest
- Internal shock absorber designed to limit arrest forces to 900lbs
- Lightweight design is an enduser favorite
- 1.25" Tubular Polyester webbing has a tensile strength of 6,000lbs
- Double-locking snaphooks at the attachment and anchorage ends

13

Material:	Finish / Style #:	Tested at:
1.25" Tubular Polyester Webbing	3-0A Yellow	TS: 6,000lbs
Internal Shock Absorber Webbing	3-0B Natural	450lb Activation
Regular Snaphooks, Alloy Steel	YCM – Yellow Cadmium	TS: 5,000lbs
Warning Labels		
Instructions		
Meets or exceeds applicable OSHA and ANSI standards, including ANSI Z359.1-1992 (R1999)		

Technical References:	
Webbing:	ANSI Z359 3.2.3.1
Shock Absorber:	ANSI Z359 2.23, 3.2.4
Snaphooks:	ANSI Z359 2.63, 2.63.1, 3.2.1
Testing Procedure:	ANSI Z359 4.2.9
Performance Rating:	1,800lbs Max Arrest Force
Performance Rating:	5,000lbs Static Load

OSHA requires that the employer shall provide a training program for each employee who might be exposed to fall hazards. As part of the training program, the user of this product must:

- Become familiar with all instructions contained in the product manual
- Be trained in the correct use and care of their equipment
- Be aware of its application limitations
- Know and understand the consequences of improper use
- FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR DEATH

Spec Sheet for 7259Y3 Internal Shock Absorbing Lanyard



Features:

- “Y”-leg lanyard for fall arrest and 100% tie-off
- Anchorage end rebar hooks have a 2.25” gate opening and allows a broader range of connections
- Internal shock absorber designed to limit arrest forces to 900lbs
- Lightweight design is an enduser favorite
- 1.25” Tubular Polyester webbing has a tensile strength of 6,000lbs
- Double-locking snaphook at attachment end and two rebar hooks at anchorage ends

Material:	Finish / Style #:	Tested at:
1.25” Tubular Polyester Webbing	3-0A Yellow	TS: 6,000lbs
Internal Shock Absorber Webbing	3-0B Natural	450lb Activation
Regular Snaphook, Alloy Steel	YCM – Yellow Cadmium	TS: 5,000lbs
Regular Rebar Hooks, Alloy Steel	YCM – Yellow Cadmium	TS: 5,000lbs
Warning Labels		
Instructions		
Meets or exceeds applicable OSHA and ANSI standards, including ANSI Z359.1-1992 (R1999)		

Technical References:	
Webbing:	ANSI Z359 3.2.3.1
Shock Absorber:	ANSI Z359 2.23, 3.2.4
Snaphooks:	ANSI Z359 2.63, 2.63.1, 3.2.1
Testing Procedure:	ANSI Z359 4.2.9
Performance Rating:	1,800lbs Max Arrest Force
Performance Rating:	5,000lbs Static Load

OSHA requires that the employer shall provide a training program for each employee who might be exposed to fall hazards. As part of the training program, the user of this product must:

- Become familiar with all instructions contained in the product manual
- Be trained in the correct use and care of their equipment
- Be aware of its application limitations
- Know and understand the consequences of improper use
- FAILURE TO FOLLOW INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR DEATH